


AQUAFIX®SEPARATOARE

SERIA „PP” FABRICATE DIN POLIPROPILENA
UN SISTEM PENTRU TOATE CAZURILE.



BOMAR SOLUTION

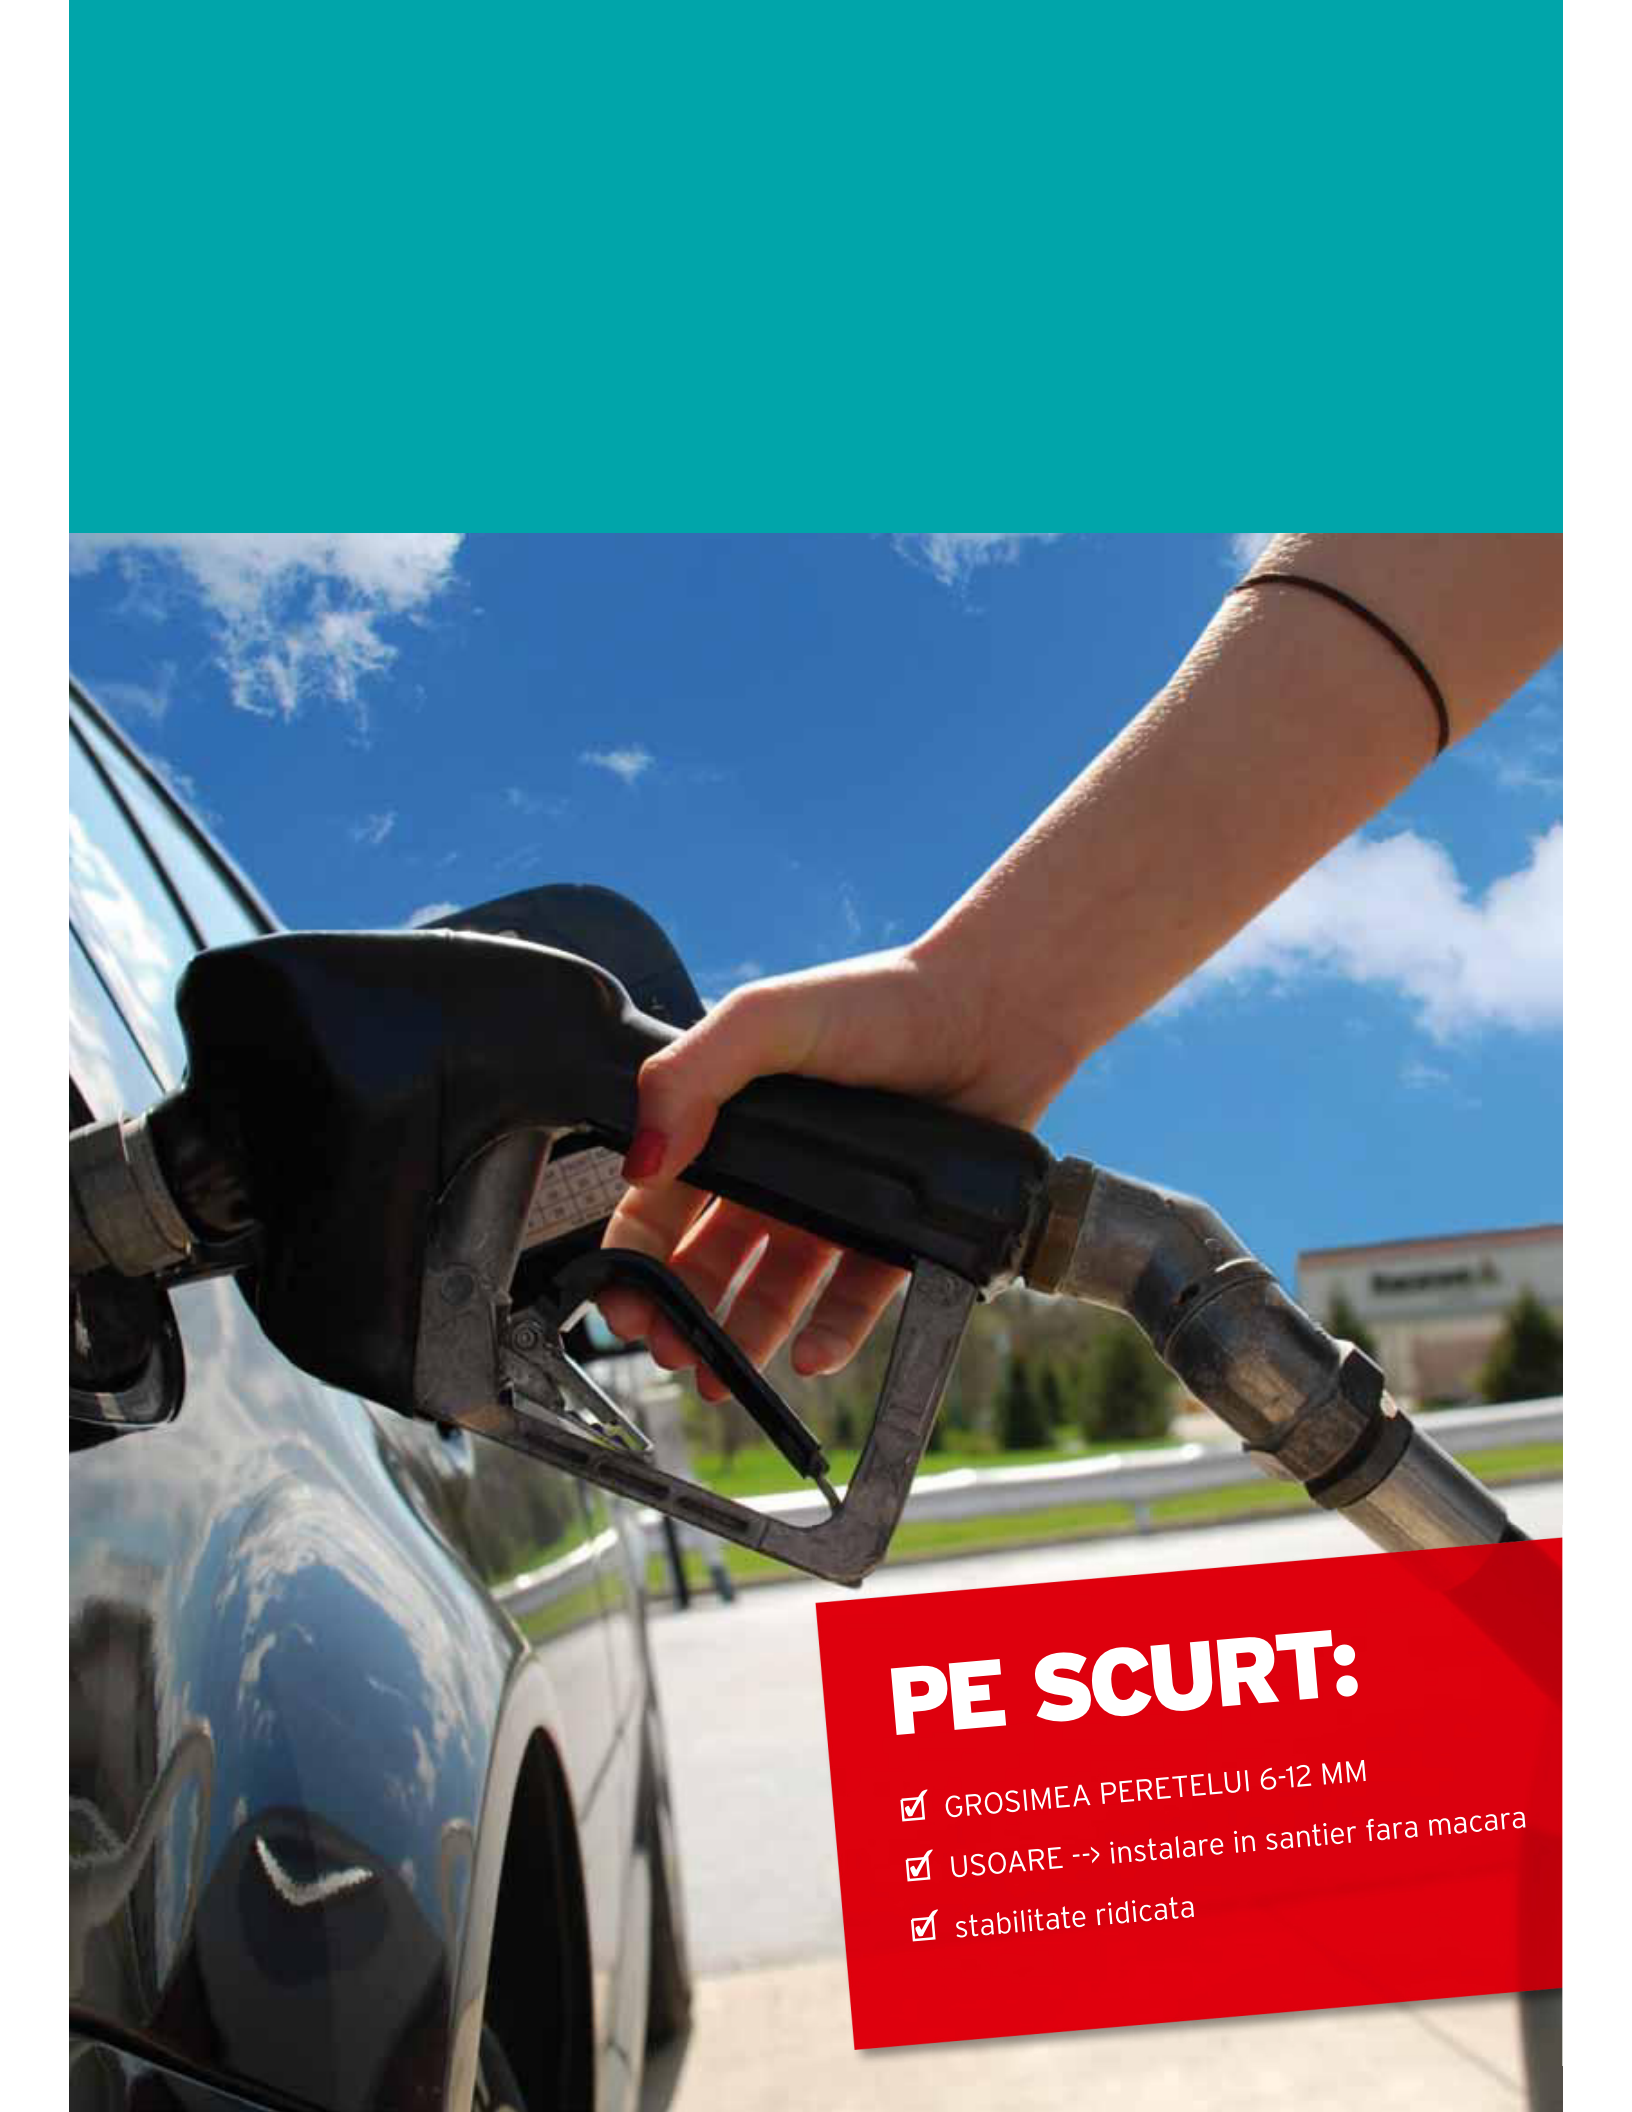

A photograph of a hand holding a black fuel nozzle, positioned next to the gas tank of a dark-colored car. The background shows a clear blue sky with some clouds and a blurred building in the distance. A red banner is overlaid on the bottom right of the image.

PE SCURT:

- ☑ GROSIMEA PERETELUI 6-12 MM
- ☑ USOARE --> instalare in santier fara macara
- ☑ stabilitate ridicata

AQUAFIX® SEPARATOARE

SERIA „PP” FABRICATE DIN POLIPROPILENA
UN SISTEM PENTRU TOATE CAZURILE.

AVANTAJE




- grosimea peretelui 6-12 mm
- inele de ridicare pentru manevrare in pozitie orizontala sau verticala
- protectie la flotabilitate
- conform standardelor EN 858 sau EN 1825
- guri de vizitare largi 800mm
- pentru separatoare de hidrocarburi:
 - sistem automat de inchidere usor de indepartat
 - element de coalescenta usor de curatat
- posibilitate de integrare a unui instrument de inregistrat probe

EXTENSII

Extensie cu inaltimea de 500 mm inclusa, extensie suplimentara la cerere. Sunt disponibile capace in clasa A sau D




AQUAFIX® SEPARATOARE DIN POLIPROPILENA - SERIA PP

AQUAFIX® - KPP SEPARATOR DE HIDROCARBURI CU FILTRU COALESCENT

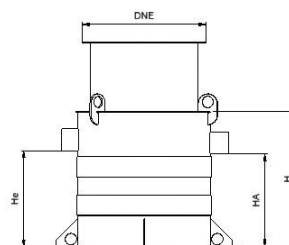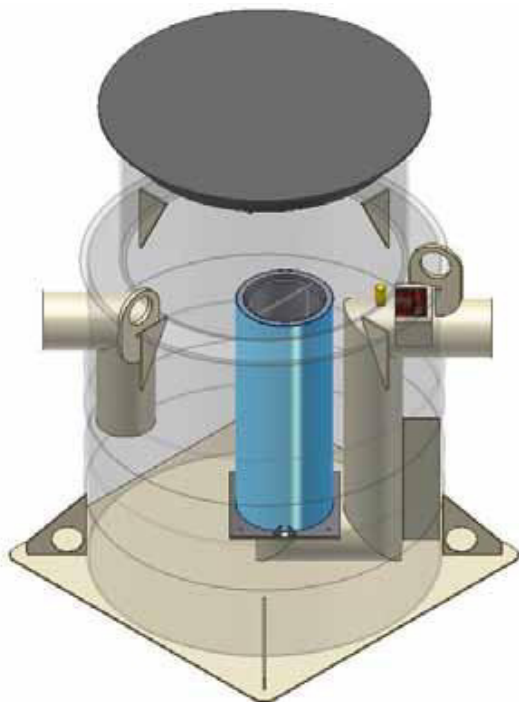

	Lun- gime mm	Latime mm	Inalti- me mm	Debit max. l/s	Ø Sepe- rator mm	Capaci- tate de- cantor l	Capaci- tate sepa- rator l	DN intr./ iesire mm	HE intra- re mm	HA iesire mm	DNE gura de vizita- re 1	DNE gura de vizita- re 2	Greu- tate kg	Capaci- tate stocare l	Articol Nr.
KPP 04	700	700	1044	4	588	-	191	100	706	681	600	-	30,0	57	283504
KPP 06	850	850	1500	6	788	-	339	150	706	681	800	-	57,0	101	283506
KPP 10	1000	1000	1496	10	938	-	478	150	702	677	800	-	67,0	142	283510
KPP 15	1240	1240	1749	15	1174	-	1140	200	853	828	800	-	144,0	226	283515
KPP 20	1500	1500	1749	20	1414	-	1325	200	853	828	800	-	161,0	321	283520

AQUAFIX® - SKPP Separator de hidrocarburi cu filtru coalescent si decantor de namol

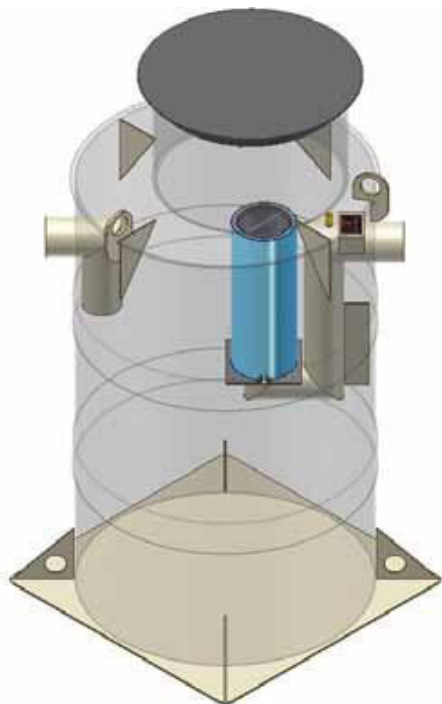

	Lun- gime mm	Lati- me mm	Inalti- me mm	Debit max. l/s	Sepe- rator mm	Capa- citate decan- tor l	Capa- citate sepa- rator l	DN intr./ iesire mm	HE intrare mm	H iesire mm	HA capac 1 mm	DNE capac 2	Greu- tate kg	Capaci- tate stocare l	Articol Nr.
SKPP 04/0400	1000	1000	1840	4	938	424	478	100	1071	1046	800	-	67,0	142	284004
SKPP 06/0600	1000	1000	2345	6	938	603	478	150	1551	1526	800	-	82,0	142	284006
SKPP 06/1200	1240	1240	2480	6	1174	1211	551	150	1604	1579	800	-	120,0	226	284106
SKPP 10/1000	1240	1240	2480	10	1174	1011	751	150	16084	1579	800	-	120,0	222	284010
SKPP 10/2500	1500	1500	3074	10	1418	2500	1084	150	2198	2173	800	-	160,0	353	284110
SKPP 15/1500	1500	1500	2704	15	1414	1547	1325	200	1808	1783	800	-	230,0	353	284015
SKPP 15/3000	2000	2000	2804	15	1886	3023	2364	200	1908	1883	800	-	280,0	573	284115
SKPP 20/2000	2000	2000	2446	20	1886	2020	2364	200	1550	1525	800	-	256,0	573	284020
SKPP 20/4000	2500	2500	2654	20	2356	4026	3670	200	1758	1733	800	-	340,0	890	284120

AQUAFIX® OTEL „G”

AQUAFIX® OTEL „K”

AQUAFIX® BETON


AQUAFIX® „10 PE”

AQUAFIX® „PP”

INSTRUCTIUNI
DE INSTALARE

AQUAFIX® SEPARATOARE DIN POLIPROPILENA - SERIA PP

AQUAFIX® - SKBPPP Separator de hidrocarburi cu filtru coalescent, decantor de namol si bypass



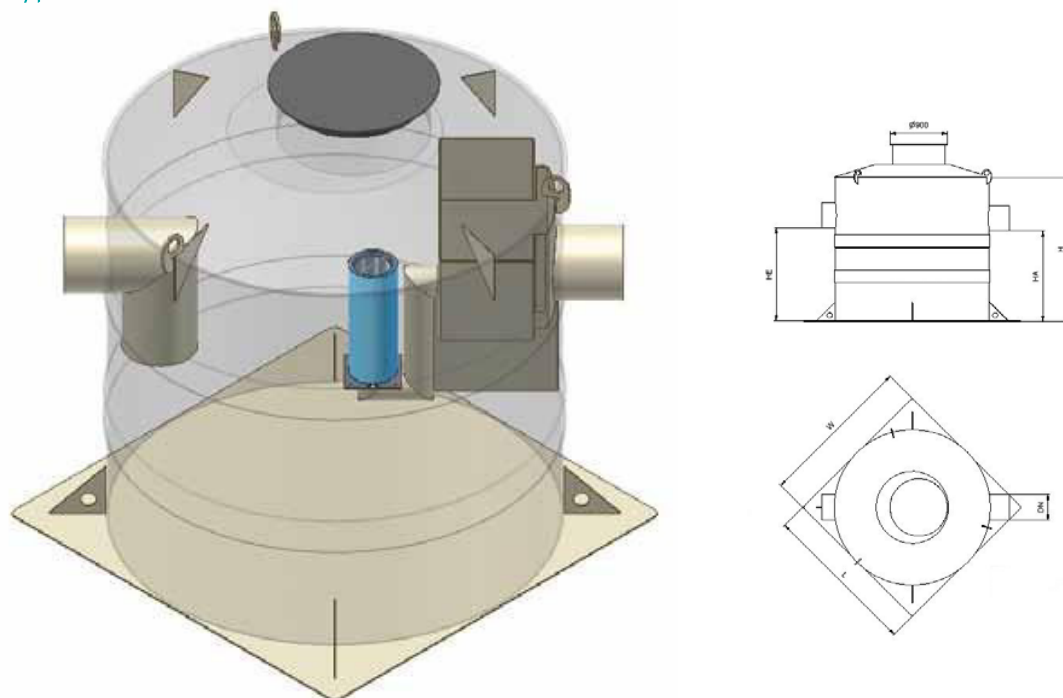


	Lun- gime mm	Lati- me mm	Inalti- me mm	Debit max. l/s	Sepe- rator tate mm	Capaci- tate de- cantor l	Capa- citate sepa- rator l	DN intr./ iesire mm	HE H intra- re mm	HA H iesire mm	DNE gura de vizita- re 1	DNE gura de vizita- re 2	Greu- tate kg	Capaci- tate stocare l	Articol Nr.
SKBPPP 10/050	2500	2500	2772	50	2356	1441	5049	300	1510	1460	800	-	350,0	890	283610
SKBPPP 15/075	2500	2500	3074	75	2356	1842	5583	400	1717	1667	800	-	380,0	890	283615

AQUAFIX® - SK2BPPP Separator de hidrocarburi cu filtru coalescent, decantor de namol si bypass marit

	Lun- gime mm	Lati- me mm	Inalti- me mm	Debit max. l/s	Sepe- rator mm	Capa- citate decan- tor l	Capa- citate sepa- rator l	DN intr./ iesire mm	HE H intra- re mm	HA H iesire mm	DNE gura de vizita- re 1	DNE gura de vizita- re 2	Greu- tate kg	Capaci- tate stocare l	Articol Nr.
SK2BPPP 10/100	2500	2500	2774	100	2356	1441	4871	400	1467	1417	800	-	340,0	890	283010
SK2BPPP 15/150	2500	2500	3074	150	2356	1842	5361	500	1667	1617	800	-	380,0	890	283015

AQUAFIX® - SPP Decantor de namol

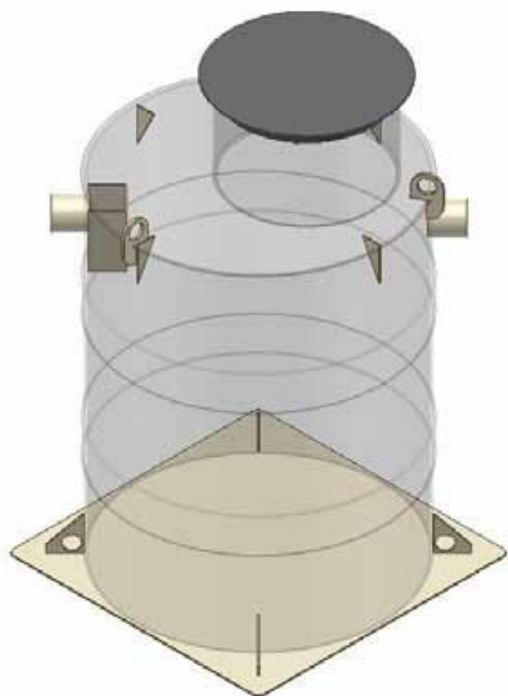

	Lun- gime mm	Latime mm	Inalti- me mm	Debit max. l/s	Sepe- rator tate de- mm	Capaci- tate de- cantor l	Capaci- tate sepa- rator l	DN intr./ iesire mm	HE intra- re mm	HA iesire mm	H mm	DNE gura de vizita- re 1	DNE gura de vizita- re 2	Greu- tate kg	Capaci- tate stocare l	Articol Nr.
SPP 0600/06	1000	1000	1675	-	938	607	-	150	901	876	800	-	-	54,0	-	284306
SPP 1000/10	1240	1240	1727	-	1174	1008	-	150	955	930	800	-	-	78,0	-	284310
SPP 1500/15	1500	1500	1804	-	1414	1545	-	200	990	965	800	-	-	128,0	-	284315
SPP 2000/20	1500	1500	2016	-	1414	2016	-	150	1323	1298	800	-	-	140,0	-	284320
SPP 2500/10	1500	1500	2449	-	1414	2615	-	200	1655	1630	800	-	-	160,0	-	284325
SPP 2500/20	1500	1500	2449	-	1414	2581	-	200	1635	1610	800	-	-	160,0	-	284326

AQUAFIX® OTEL „G”

AQUAFIX® OTEL „K”

AQUAFIX® BETON



AQUAFIX® „10 PE”

AQUAFIX® „PP”

INSTRUCTIUNI
DE INSTALARE




AQUAFIX® SEPARATOARE DIN POLIPROPILENA - SERIA PP

AQUAFIX® - FPP Separator de grasimi

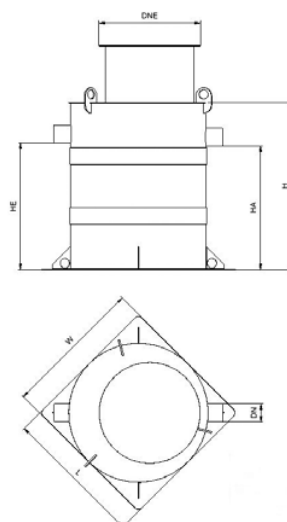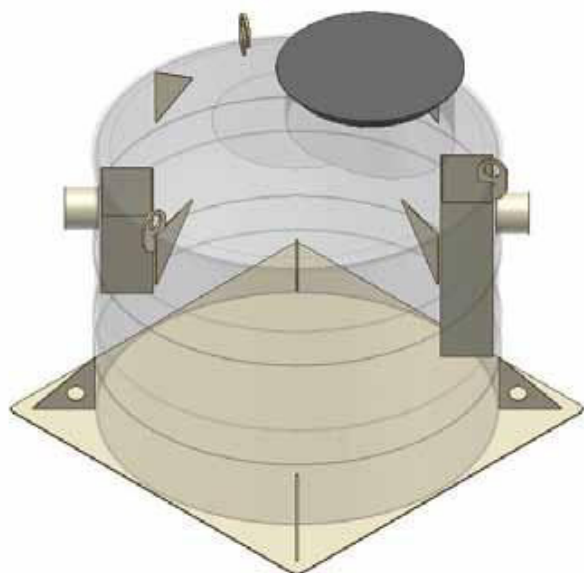

	Lun- gime mm	Latime mm	Inalti- me mm	Debit max. l/s	Sepe- rator tate de- mm	Capaci- tate de- cantor l	Capa- citate sepa- rator l	DN intr./ iesire mm	HE intra- re mm	HA H iesire mm	DNE gura de vizita- re 1	DNE gura de vizita- re 2	Greu- tate kg	Capaci- tate stocare l	Articol Nr.
FPP 02	1000	1000	1694	2	938	-	567	150	825	800	800	-	60,0	157	285002
FPP 04	1240	1240	1998	4	1174	-	1223	150	1127	1102	800	-	83,0	226	285004
FPP 07	1500	1500	2224	7	1414	-	2008	200	1278	1251	800	-	160,0	321	285007
FPP 10	2000	2000	2008	10	1886	-	3008	200	1078	1053	800	-	196,0	573	285010
FPP 15/20	2500	2500	2219	20	2356	-	5561	200	1278	1253	800	-	270,0	890	285020

AQUAFIX® - SFPP Separator de grasimi cu decantor de namol

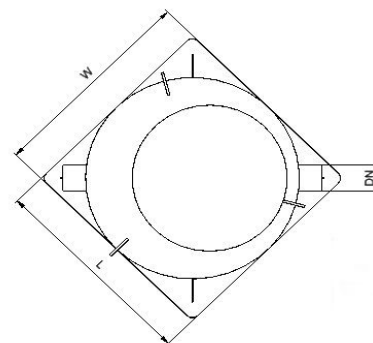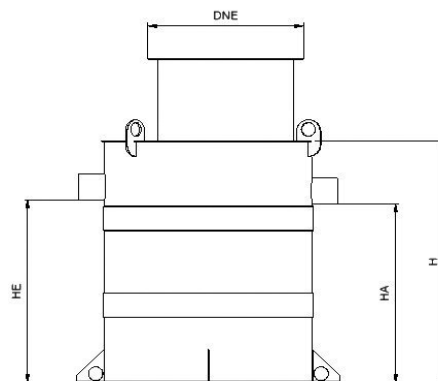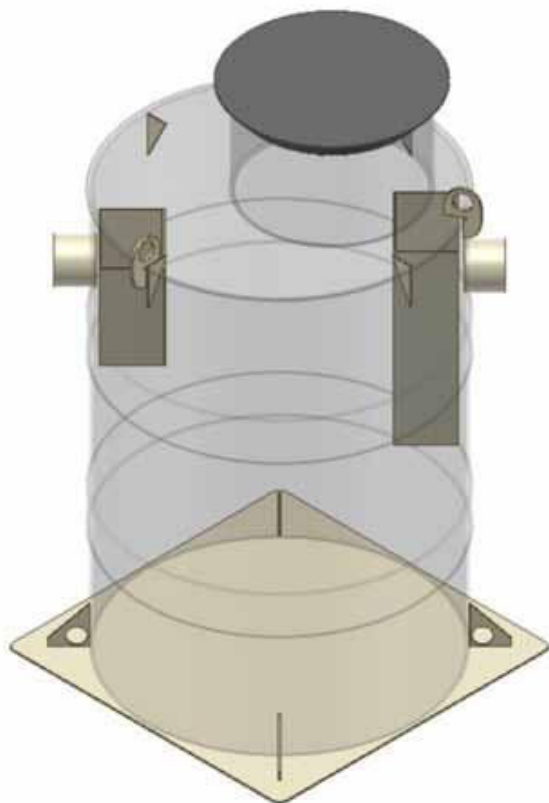

	Lungime mm	Latime mm	Inaltime mm	Debit max. l/s	Capacitate decanor l	DN intr./iesire mm	HE H intrare mm	HA H iesire mm	DNE gura de vizitare	Greutate kg	Articol Nr.
SFPP 02/200	1000	1000	2035	2	200	150	1166	1141	800	66,0	285302
SFPP 02/400	1000	1000	2305	2	400	150	1436	1411	800	71,0	285303
SFPP 04/400	1200	1200	2307	4	400	150	1436	1411	800	90,0	285304
SFPP 04/800	1240	1240	2654	4	800	150	1803	1778	800	980	285305
SFPP 07/700	1500	1500	2654	7	700	200	1708	1683	800	180,0	285307
SFPP 07/1400	1500	1500	3104	7	1400	200	2158	2133	800	200,0	285308
SFPP 10/1000	2000	2000	2116	10	1000	200	1183	1158	800	203,0	285310
SFPP 10/2000	2000	2000	2466	10	2000	200	1533	1508	800	227,0	285311

AQUAFIX® OTEL „G”

AQUAFIX® OTEL „K”

AQUAFIX® BETON

AQUAFIX® „10 PE”

AQUAFIX® „PP”

INSTRUCTIUNI
DE INSTALARE